




**smart
vision lights**

DFL-460 *Connect-a-Light* LINEAR LIGHT DARK FIELD

P R O D U C T D A T A S H E E T

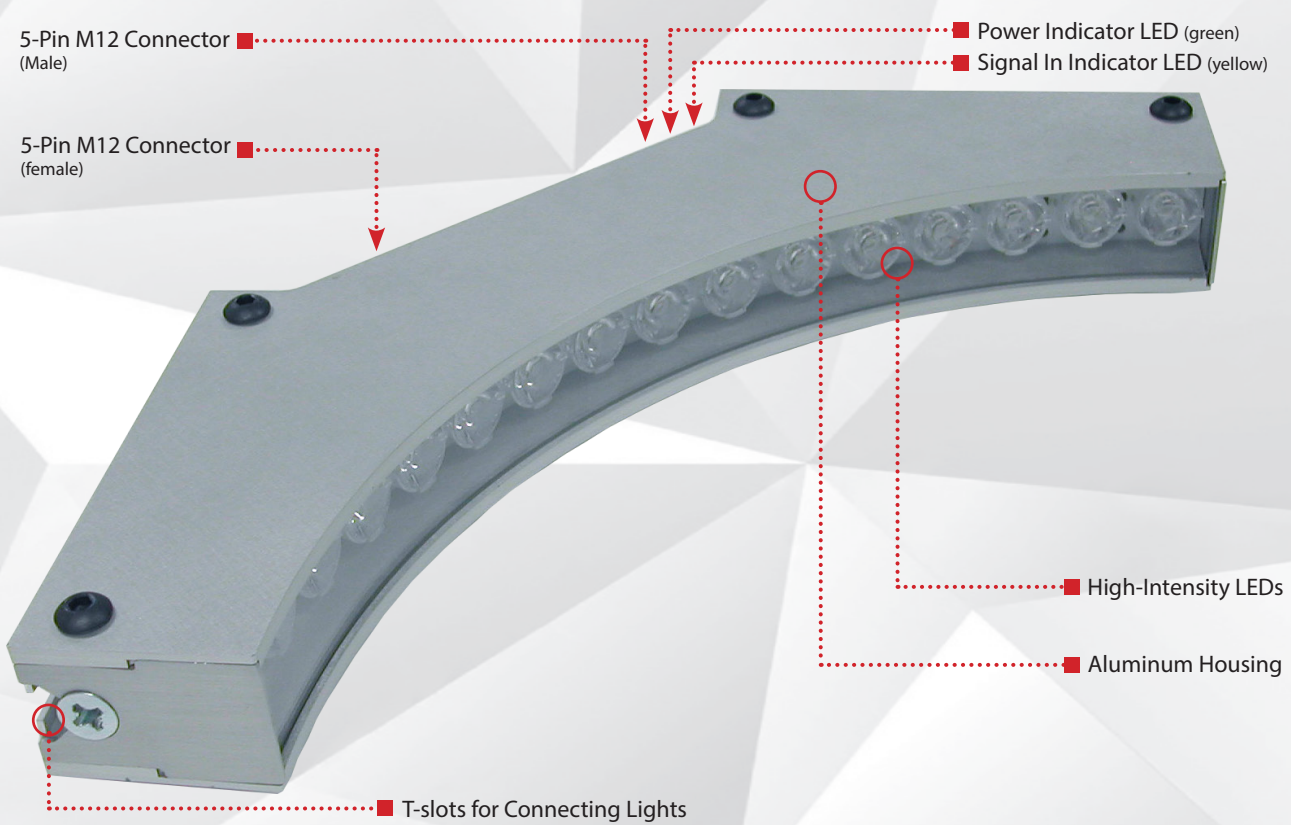

Warranty 10 YEAR	Compliant IEC 62471	Compliant CE RoHS	Rated IP 50	Connector 5-PIN M12
-------------------------------	----------------------------------	--------------------------------	---------------------------------	---

PRODUCT HIGHLIGHTS

- ✓ Ability to “wrap” light around curved surfaces
- ✓ Built-in driver
- ✓ PNP and NPN trigger signal input
- ✓ T-slot for mounting and for daisy-chaining lights together
- ✓ Easily connect lights to get 180°, 270°, or 360° illumination coverage





PRODUCT DESCRIPTION

The DFL-460 Dark Field Linear Light provides a round 90° light illumination, allowing the light to “wrap” around a curved surface. Daisy-chain up to 4 lights together to cover an area up to 360°. Use NPN or PNP trigger signal to control the light's pulse. Control intensity via a 1–10V analog signal line.




PRODUCT SPECIFICATIONS

Electrical Input	24VDC +/- 5%
Input Current	Max. 2A
Wattage	Max. 48 W
On/Off Input	PNP : +4VDC or greater to activate NPN : GND (<1VDC) to activate
PNP Line	4 mA @ 4VDC 10 mA @ 12VDC 20 mA @ 24VDC
NPN Line	15 mA @ ground (0V DC)
Yellow Indicator LED	LED strobe indicator ON = light active
Green Indicator LED	ON = Power
Continuous Mode	NPN can be tied to ground OR PNP can be tied to 24VDC (not both)
Analog Intensity	Brightness output is adjustable from 10%–100% via a 1–10VDC signal. (Jumpering pin 5 to pin 1 will provide maximum intensity.)
Connection	5-pin M12 connector
Ambient Temperature	0°–40°C (32°–114°F)
IP Rating	IP50
Weight	~455 g
Compliances	CE, RoHS, IEC 62471
Warranty	10 year warranty. For complete warranty information, visit smartvisionlights.com/warranty .



WIRING CONFIGURATION



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power in	+24VDC	BROWN
2	NPN Strobe	GND for active ON	WHITE
3	Ground	GND	BLUE
4	PNP Strobe	+24VDC for active on	BROWN
5	Intensity Control	1-10VDC	GREY

*Some cables use green/yellow for pin 5.

For maximum intensity, tie pin 5 to pin 1 at +24VDC.

For continuous mode, PNP (pin 4) can be tied to +24VDC (pin 1) **or** NPN (pin 2) can be tied to Ground (pin 3).

OPTIONAL

For maximum intensity, connect pin 5 to pin 1 at +24VDC.




RESOURCE CORNER

Additional resources, including CAD files, videos, and application examples, are available on our website.




AREA ILLUMINATION

Connect up to four DFL-460 linear lights together. When four lights are connected, the inside diameter is 460 mm.

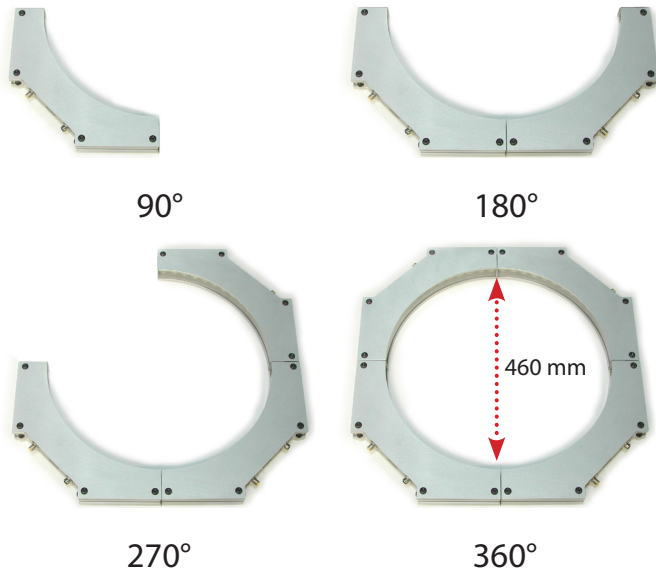

"WRAP" LIGHT

The DFL-460 is able to "wrap" around an object. This feature allowing for a homogeneous light pattern to be outputted onto a curved surface.

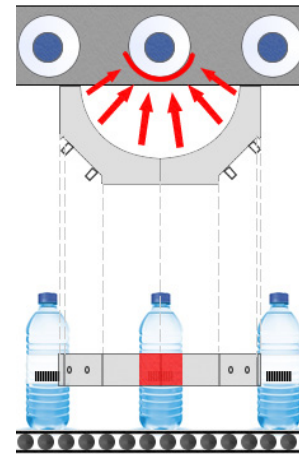

LIGHT PATTERNS

LIGHTING PATTERN FOR THE DFL-460 with Line Standard Lenses

Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	36,000
<i>Illumination measurement taken on White Lights, 5700K</i>	

LIGHTING PATTERN FOR THE DFL-460 with Wide (W) Lenses




Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	24,000
<i>Illumination measurement taken on White Lights, 5700K</i>	

LIGHTING PATTERN FOR THE DFL-460 with Narrow (N) Lenses

Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	67,000
<i>Illumination measurement taken on White Lights, 5700K</i>	

The DFL-460 Linear Light produces a uniform light pattern.


Working Distance = 500 mm Grid set to 25 mm x 25 mm

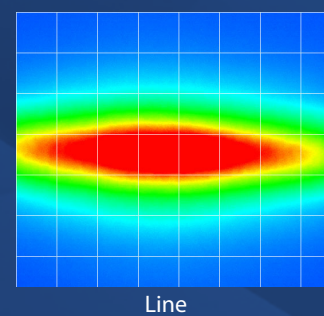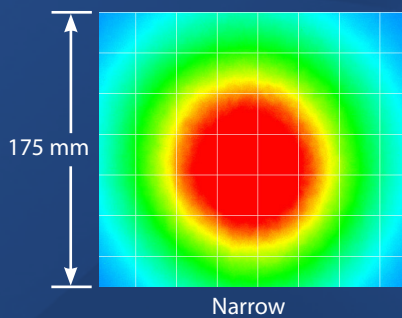




PRODUCT DRAWING

CAD files available on our website.
Dimensions are in mm.

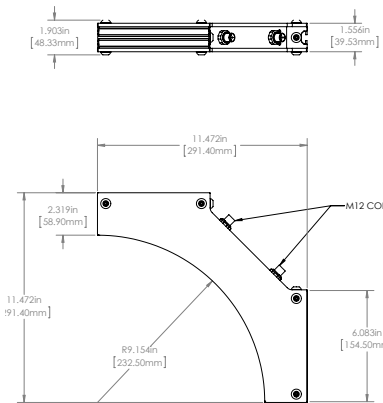

ILLUMINATION

DFL-460 Series of Linear Lights works best for:



Dark Field



EYE SAFETY

According to IEC 62471:2006. Full documentation available upon request.



Notice

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelengths 625, 850, and 940.

Caution

Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths 470, 505, 530, and WHI.



PART NUMBER

DFL-460 — —

COLOR: **LENS:**

WHI 470 505
530 625 850 940

Leave blank for Standard (Line)

W = Wide
N = Narrow

Part Number Examples:

- DFL-460-625** DFL-460, 625 nm Red Wavelength, Standard (Line) Lens
- DFL-460-WHI-N** DFL-460, White, Narrow Lens

*Line lens optic not available for UV wavelengths.
Additional wavelengths and lens options available upon request.*



STANDARD LENS OPTICS

NARROW

Narrow, 14° angle-cone lenses are standard. Standard lenses project a narrow beam of illumination and are used for long working distances.

WIDE


Wide, 30° angle-cone lenses project a large area of illumination. They create a floodlight effect and can be used for short working distances.

LINE

Line lenses are standard.

Line, with a 10° width and a 50° fan angle, projects a thin, narrow beam of illumination.

Additional lens options available upon request.

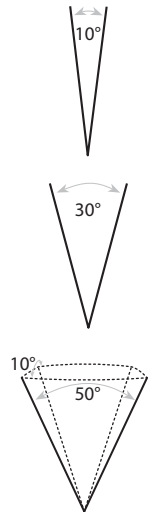

MOUNTING

Smart Vision Lights recommends using a 5/16" drop-in T-nut with the T-slot for mounting.





ACCESSORIES

Jumper Cables (Daisy Chain)



Lengths	Part Number
300 mm	5PM12-J300
1000 mm	5PM12-J1000
2000 mm	5PM12-J2000

Power Cables



Lengths	Part Number
5 m	5PM12-5
10 m	5PM12-10
15 m	5PM12-15

Connector (Only for Direct Connect)



Description	Part Number
Set of 2 Connectors	LXJ-2DTN



GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

OverDrive™ Light includes an integrated high-current strobe driver for complete LED light control.

Continuous Operation Light stays on continuously.

Multi-Drive™ Combines continuous operation and OverDrive™ strobe (high-current strobe operation) modes into one easy-to-use light.


Built-In Driver The built-in driver allows full function without the need of an external driver.

Camera to Light Connecting the light directly to the camera, without the need for additional controllers or equipment.


Polarizers Filters that reduce reflections on specular surfaces.

Diffuser Used to widen the angle of light emission, reduce reflections, and increase uniformity.


TYPES OF ILLUMINATIONS



Projector




Dark Field




Radial




Bright Field




Direct




Axial



Line




Diffuse Panel



Backlight

COLOR/WAVELENGTHS LEGEND

Wavelength options range from 365 nm to 1550 nm. Additional wavelengths available for many light families.



See Part Number section for **this light's** available standard wavelengths.



Shortwave infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, and 1550 nm.

Check Part Number section to see if **this light** is available in SWIR wavelengths.